

ss.ss2tf2io Bridge between state–space and io differential equations

1 The Laplace transform \mathcal{L} is cool af. It is used to solve differential equations and define the transfer function H : you know, just another awesome dynamic system representation. For now, we’ll use it as a bridge between state-space and input/output differential equation representations, merely waving at transfer functions as we pass through. Later, transfer functions will be considered extensively.

Laplace transform
transfer function

Transfer functions

2 Let a system have an input u and an output y . Let the Laplace transform of each be denoted U and Y , both functions of complex Laplace transform variable s . A transfer function H is defined as the ratio of the Laplace transform of the output over the input:

transfer function definition

$$H(s) = \frac{Y(s)}{U(s)}. \tag{1}$$

3 The transfer function is exceedingly useful in many types of analysis. One of its most powerful aspects is that it gives us access to thinking about systems as operating on an input u and yielding an output y .

Bridging transfer functions and io differential equations

4 Consider a dynamic system described by the input-output differential equation—with variable y representing the output, dependent variable time t , variable u representing the input, constant coefficients a_i, b_j , order n , and $m \leq n$ for $n \in \mathbb{N}_0$ —as:

$$\begin{aligned} \frac{d^n y}{dt^n} + a_{n-1} \frac{d^{n-1} y}{dt^{n-1}} + \dots + a_1 \frac{dy}{dt} + a_0 y = \\ b_m \frac{d^m u}{dt^m} + b_{m-1} \frac{d^{m-1} u}{dt^{m-1}} + \dots + b_1 \frac{du}{dt} + b_0 u. \end{aligned} \tag{2}$$

5 The Laplace transform \mathcal{L} of Eq. 2 yields something interesting (assuming zero initial conditions):

Laplace transform

$$\begin{aligned} &\mathcal{L}\left(\frac{d^n y}{dt^n} + a_{n-1}\frac{d^{n-1}y}{dt^{n-1}} + \dots + a_1\frac{dy}{dt} + a_0y\right) = \\ &\mathcal{L}\left(b_m\frac{d^m u}{dt^m} + b_{m-1}\frac{d^{m-1}u}{dt^{m-1}} + \dots + b_1\frac{du}{dt} + b_0u\right) \Rightarrow \\ &\mathcal{L}\left(\frac{d^n y}{dt^n}\right) + a_{n-1}\mathcal{L}\left(\frac{d^{n-1}y}{dt^{n-1}}\right) + \dots + a_1\mathcal{L}\left(\frac{dy}{dt}\right) + a_0\mathcal{L}(y) = \\ &b_m\mathcal{L}\left(\frac{d^m u}{dt^m}\right) + b_{m-1}\mathcal{L}\left(\frac{d^{m-1}u}{dt^{m-1}}\right) + \dots + b_1\mathcal{L}\left(\frac{du}{dt}\right) + b_0\mathcal{L}(u) \Rightarrow \\ &s^n Y + a_{n-1}s^{n-1}Y + \dots + a_1sY + a_0Y = \\ &b_ms^m U + b_{m-1}s^{m-1}U + \dots + b_1sU + b_0U. \end{aligned}$$

Solving for Y,



The inverse Laplace transform \mathcal{L}^{-1} of Y is the forced response. However, this is not our primary concern; rather, we are interested to solve for the transfer function H as the ratio of the output transform Y to the input transform U, i.e.

forced response

$$\begin{aligned} H(s) &\equiv \frac{Y(s)}{U(s)} \tag{3} \\ &= \frac{b_ms^m + b_{m-1}s^{m-1} + \dots + b_1s + b_0}{s^n + a_{n-1}s^{n-1} + \dots + a_1s + a_0}. \tag{4} \end{aligned}$$

6 Exactly the reverse procedure, then, can be used to convert a given transfer function to an input-output differential equation.

Example ss.ss2tf2io-1


re: A circuit transfer function

The circuit shown has input-output differential equation

$$L\frac{d^2v_L}{dt^2} + R\frac{dv_L}{dt} + \frac{1}{C}v_L = L\frac{d^2V_s}{dt^2}.$$

What is the transfer function from V_s to v_L ?



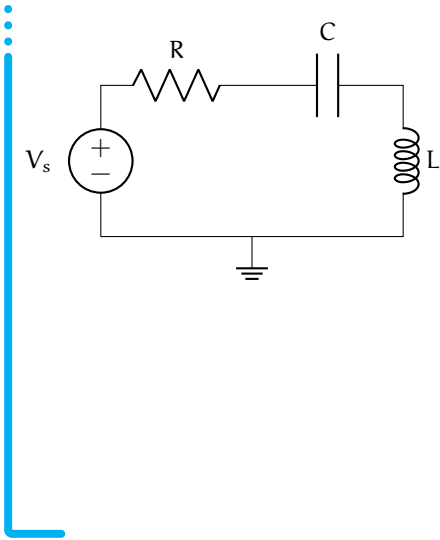

Bridging transfer functions and state-space models

7 Given a system in the standard form of a state equation,

$$\frac{dx}{dt} = Ax + Bu,$$

we take the Laplace transform to yield, assuming zero initial conditions,

which can be solved for the state:

(5)

where I is the identity matrix with the same dimension as that of A. The standard form of the output equation yields the output solution

$$Y = HU, \tag{6}$$

where we define the matrix transfer function H matrix transfer function to be

The element H_{ij} is a transfer function from the j th input U_j to the i th output Y_i .

8 The reverse procedure of deriving a state-space model from a transfer function is what is called a state-space realization, which is not a unique operation (there are different realizations for a single transfer function) and is not considered here.

state-space realization

Example ss.ss2tf2io-2

re: Matrix transfer function from state-space

Given the linear state-space model

$$\dot{\mathbf{x}} = \begin{bmatrix} -3 & 4 \\ -1 & 1 \end{bmatrix} \mathbf{x} + \begin{bmatrix} 1 \\ 0 \end{bmatrix} \mathbf{u}$$
$$\mathbf{y} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \mathbf{x} + \begin{bmatrix} 0 \\ 0 \end{bmatrix} \mathbf{u},$$

derive the matrix transfer function.

Example ss.ss2tf2io-3

re: state-space to io differential equations

For the following state-space model, derived in Example ss.nt2ss-1, derive the io differential

• equations for each output variable:

$$\frac{dx}{dt} = \begin{bmatrix} \frac{-1}{R_1 C} & \frac{-1}{C} \\ 1/L & -R_2/L \end{bmatrix} x + \begin{bmatrix} \frac{1}{R_1 C} \\ 0 \end{bmatrix} u$$

$$y = \begin{bmatrix} 0 & 1 \\ -1/R_1 & 0 \\ 0 & R_2 \end{bmatrix} x + \begin{bmatrix} 0 \\ 1/R_1 \\ 0 \end{bmatrix} u.$$

The output variables are i_L , I_S , and v_{R_2} .

