

trans.char Transient response characteristics

We define four transient response characteristics, all defined in terms of a system's step input response. For the following, please refer to the illustration in [Fig. char.1](#).

1. The rise time T_r is the duration from the time the response reaches 10 % to the time it reaches 90 % of its final value.
2. The peak time T_p is the time at which the response reaches its first or maximum peak.¹
3. The percent overshoot %OS expresses the amount the response overshoots its steady-state value, expressed as a percentage of the steady-state value.
4. The settling time T_s is the time at which the response reaches, and thereafter remains within, $\pm 2\%$ of its steady-state value.¹

1. This definition assumes the step input occurs at $t = 0$. Otherwise, subtract the nonzero initial time.

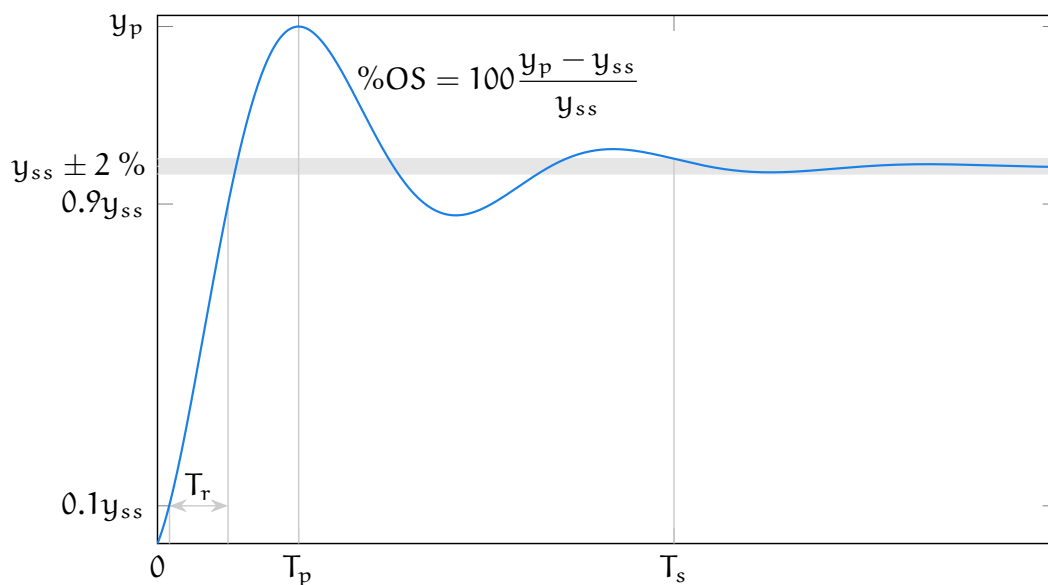


Figure char.1: transient response characteristics rise time T_r , peak time T_p , percent overshoot %OS, and settling time T_s in terms of a response's steady-state y_{ss} and peak y_p .